

Informationen zum Produkt



1500V-M


Weitere Füllvolumen SERIE-OVM:
200ml – 250ml – 300ml



Füllvolumen:	Maße:	Höhe o.D.:	Gewicht Becher, Deckel (+/- 3%)	IML-Druck Becher und Boden	IML-Druck Deckel	Weiteres:
150ml	131x95mm	37mm	15g / 8g	ja	ja	Siehe Spez.
<ul style="list-style-type: none"> • PP-Spritzgussbecher mit Originalitätsverschluss (Zertifikat Lebensmittelsicherheit) • Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich) 						
Menge je Palette Schalen:	in 20 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
10.000 St.	500 St.	590x390x400mm 850g	120g	1200x800x150mm 12kg	2,15m	Siehe Spez.
Menge je Palette Deckel:	in 40 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
40.000 St.	1.000 St.	400x390x300mm 400g	100g	1200x800x150mm 12kg	2,25m	Siehe Spez.

Technical specification:

Tolerance:
 Weight/Volume +/- 5,0%
 Dimensions +/- 0,5 mm

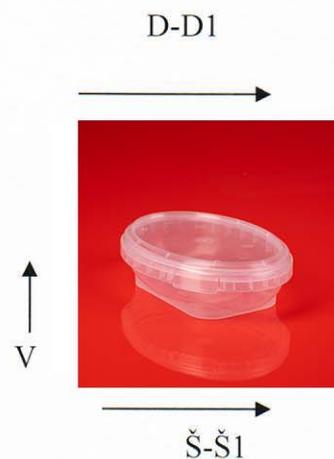

		Container	Lid
Volume up to edge		150ml.	
Material/weight		PP/ 15 g	PP/ 8 g
Top dimension D-D1		131,4x94,5mm	D1 128,1x91,4mm
Bottom dimension Š-Š1		90x60mm	
Height with lid V		V 37 mm	8,5 mm
Number in 1 ct		500	1000
Number of ct on 1 palette		20	40

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

Hot filling:

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

Cold temperatures:

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

Storage:

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.