

Informationen zum Produkt




S200Q Siegelschale



| Füllvolumen: | Maße: | Höhe: | Gewicht Becher, Deckel (+/-3%) | IML-Druck Becher | IML- Druck Deckel | Weiteres: |
|--|----------------------------|----------------------------|--------------------------------------|-------------------------------|-------------------------|-------------|
| 200ml | 99x99mm | 39mm | 11,5g / 9g | ja | ja | Siehe Spez. |
| <ul style="list-style-type: none"> • PP-Spritzguss-Siegelbecher mit Siegelrand (Zertifikat Lebensmittelsicherheit) • Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich) | | | | | | |
| Menge je Palette Schalen: | in 16 Boxen gepackt je: | Maß/Gewicht je Umkarton | Gewicht je Folienbag | Maß/Gewicht Einweg-Palette | Pal-Höhe | Weiteres: |
| 24.000 St. | 1.500 St. | 520x385x435mm 550g | 120g | 1200x800x150mm 12kg | 2,20m | Siehe Spez. |
| Menge je Palette Deckel: | in 16 Boxen gepackt je: | Maß/Gewicht je Umkarton | Gewicht je Folienbag | Maß/Gewicht Einweg-Palette | Pal-Höhe | Weiteres: |
| 15.360 St. | 960 St. | 400x390x300mm 360g | 100g | 1200x800x150mm 12kg | 2,20m | Siehe Spez. |

Technical specification:

Tolerance:
 Weight/Volume +/- 5,0%
 Dimensions +/- 0,5 mm

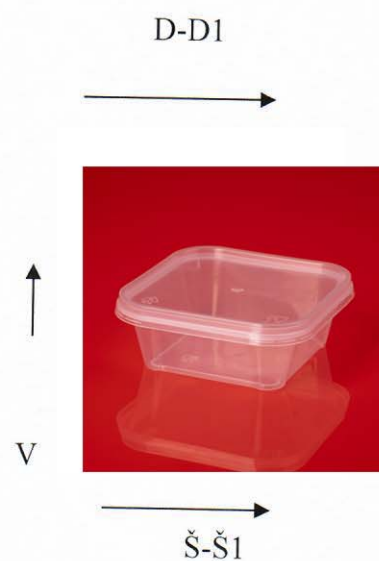

| | Container | lid |
|---|-------------|--------------|
| Volume to the edge | 200ml. | |
| Material/weight | PP/ 11,5 g | PP/ 9 g |
| Top dimension D-D1 | 99x99mm | D1 101x101mm |
| Bottom dimension Š-Š1 | 74,7x74,7mm | |
| Height with lid V | V 39 mm | 9,6 mm |
| Number in 1 ct | 1500 | 960 |
| Number of ct on 1 pal. | 16 | 16 |
| Note:under lid has to be foil, could be used only with foil – without lid | | |

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

Hot filling:

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

Cold temperatures:

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

Storage:

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.