

Informationen zum Produkt




Deckel nur optional auf Anfrage



Füllvolumen:	Ø:	Höhe:	Gewicht Becher (+/- 3%)	IML-Druck Becher	IML-Druck Deckel	Weiteres:
405ml	106mm	68mm	16g	nein	-	Siehe Spez.
<ul style="list-style-type: none"> • PP-Spritzguss-Siegelbecher mit Siegelrand (Zertifikat Lebensmittelsicherheit) • Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich) 						
Menge je Palette Schalen:	in 16 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
8.640 St.	540 St.	520x385x420mm 450g	120g	1200x800x150mm 12kg	2,20m	Siehe Spez.
Menge je Palette Deckel:	in x Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
- St.	- St.	-mm -g	-g	-mm -kg	-m	-

Technical specification:

Tolerance:
 Weight/Volume +/- 5,0%
 Dimensions +/- 0,5 mm

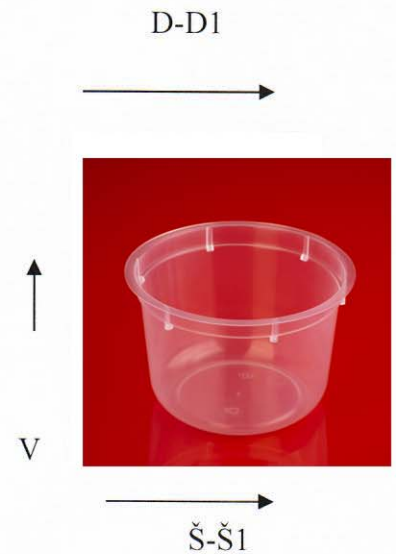

	Container	
Volume up to the edge	405 ml.	
Material/weight	PP/ 16 g	
Top dimension D-D1	106 mm	
Bottom dimension Š-Š1	68 mm	
Height V	V 68 mm	
Number in 1 ct	540	
Number of ct on 1 pal.	16	
Container should be used with foil and Thermolid		

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

Hot filling:

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

Cold temperatures:

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

Storage:

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.