

Informationen zum Produkt



2500V-M


Weitere Füllvolumen SERIE-OVM:
150ml – 200ml – 300ml



Füllvolumen:	Maße:	Höhe o.D.:	Gewicht Becher, Deckel (+/- 3%)	IML-Druck Becher und Boden	IML-Druck Deckel	Weiteres:
250ml	131x95mm	51mm	18g / 8g	ja	ja	Siehe Spez.
<ul style="list-style-type: none"> • PP-Spritzgussbecher mit Originalitätsverschluss (Zertifikat Lebensmittelsicherheit) • Standardausführung: klar mit klarem Deckel (Einfärbung in Standard-/Sonderfarben möglich) 						
Menge je Palette Schalen:	in 20 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
10.000 St.	500 St.	590x390x400mm 850g	120g	1200x800x150mm 12kg	2,15m	Siehe Spez.
Menge je Palette Deckel:	in 40 Boxen gepackt je:	Maß/Gewicht je Umkarton	Gewicht je Folienbag	Maß/Gewicht Einweg-Palette	Pal-Höhe	Weiteres:
40.000 St.	1.000 St.	400x390x310mm 400g	100g	1200x800x150mm 12kg	2,25m	Siehe Spez.

Technical specification:

Tolerance: Weight/Volume +/- 5,0% Dimensions +/- 0,5 mm

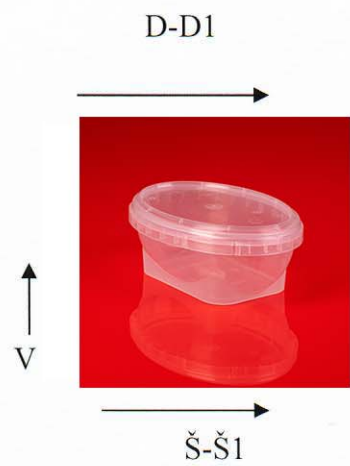

		Container	Lid
Volume up to edge		250ml.	
Material/Weight		PP /18 g	PP /8 g
Top dimension D-D1		131,4x94,5mm	D1 128,1x91,4mm
Bottom dimension Š-Š1		90x60mm	
Height with lid V		V 51,3 mm	8,5 mm
Number in 1 ct		500	1000
Number of ct on 1 pal.		20	40
Poznámky			

Other characteristic

Uses:

containers with lids are intended for direct contact with watery, acidic, fat food products, which temperature is room and lower.

Hot filling:

packaging is suitable for contact with the hot filling (85°C-95°C) and short-term use in the microwave. Packaging must be tested by the customer with the actual product before to written approval for use at hot temperatures.

Cold temperatures:

packaging made from the special cold-resistant material can be used at temperatures -20°C. It is produced according to customer requirements. Packaging must be tested by the customer with the actual product before to written approval for use at low temperatures.

Storage:

suitable storage includes protection of direct sun light, rain, very high temperatures over a long period. Packaging must be not more than 2,4m in height and at least 1m away from heat source.

Recommended period of storage – 12 months after delivery to suitable storage.